Specifications



Extended rotary handle kit, TeSys Deca, IP54, black handle, with trip indication, for GV2L-GV2P

GV2APN01



Main

Range	TeSys TeSys Deca	
Device short name	GV2AP	
Product or component type	Rotary handle kit	
Accessory / separate part category	Control accessory	
Handle colour	Black	
Handle front plate colour	Grey	

Complementary

o o mpromomary	
Product compatibility	GV2P GV2L
Rotary handle padlocking	Padlock in OFF position Padlock in ON position
Rotary handle mounting style	Extended
Locking options description	1 to 3 padlocks
Back/Door distance	140250 mm
Net weight	0.2 kg

Environment

IP degree of protection	IP54	

Packing Units

Unit Type of Package 1	PCE	
Number of Units in Package 1 1		
Package 1 Weight	362.0 g	
Package 1 Height	6.5 cm	
Package 1 width	9 cm	
Package 1 Length	37 cm	
Unit Type of Package 2	S03	
Number of Units in Package 2	12	
Package 2 Weight	4.728 kg	


Package 2 Height	30 cm	
Package 2 width	30 cm	
Package 2 Length	40 cm	
Unit Type of Package 3	P06	
Number of Units in Package 3	96	
Package 3 Weight	50.492 kg	
Package 3 Height	77 cm	
Package 3 width	60 cm	\ /
Package 3 Length	80 cm	

Offer Sustainability

Sustainable offer status	Green Premium product		
REACh Regulation	REACh Declaration		
EU RoHS Directive	Compliant EU RoHS Declaration		
Mercury free	Yes		
RoHS exemption information	Yes		
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information		
Environmental Disclosure	Product Environmental Profile		
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov		

Contractual warranty

Warranty 18 months

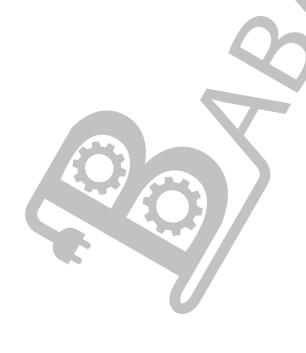

Product data sheet

GV2APN01

Dimensions Drawings

Mounting of External Operator GV2APN01, GV2APN02 or GV2APN04 for Motor Circuit Breakers GV2L

