

# Product datasheet کلیک کنید

Specifications



## TeSys D contactor - 3P(3 NO) - AC-3 - <= 440 V 65 A - 24 V DC standard coil

LC1D65ABD



### Main

|                                |   |
|--------------------------------|---|
| Range                          | TeSys<br>TeSys Deca   |
| Range Of Product               | TeSys Deca  |
| Product Or Component Type      | Contactors  |
| Device Short Name              | LC1D  |
| Contactors Application         | Motor control<br>Resistive load   |
| Utilisation Category           | AC-4<br>AC-1<br>AC-3<br>AC-3e   |
| Poles Description              | 3P  |
| [Ue] Rated Operational Voltage | Power circuit: <= 690 V AC 25...400 Hz<br>Power circuit: <= 300 V DC  |
| [Ie] Rated Operational Current | 80 A (at <60 °C) at <= 440 V AC AC-1 for power circuit<br>65 A (at <60 °C) at <= 440 V AC AC-3 for power circuit<br>65 A (at <60 °C) at <= 440 V AC AC-3e for power circuit |
| [Uc] Control Circuit Voltage   | 24 V DC   |

### Complementary

|   |   |
|---|---|
| Motor Power Kw                              | 11 kW at 400 V AC 50/60 Hz (AC-4)<br>18.5 kW at 220...230 V AC 50/60 Hz (AC-3)<br>30 kW at 380...400 V AC 50/60 Hz (AC-3)<br>37 kW at 500 V AC 50/60 Hz (AC-3)<br>37 kW at 660...690 V AC 50/60 Hz (AC-3)<br>18.5 kW at 220...230 V AC 50/60 Hz (AC-3e)<br>30 kW at 380...400 V AC 50/60 Hz (AC-3e)<br>37 kW at 500 V AC 50/60 Hz (AC-3e)<br>37 kW at 660...690 V AC 50/60 Hz (AC-3e) |
| Motor Power Hp                              | 40 hp at 460/480 V AC 50/60 Hz for 3 phases motors<br>5 hp at 115 V AC 50/60 Hz for 1 phase motors<br>10 hp at 230/240 V AC 50/60 Hz for 1 phase motors<br>20 hp at 200/208 V AC 50/60 Hz for 3 phases motors<br>20 hp at 230/240 V AC 50/60 Hz for 3 phases motors<br>50 hp at 575/600 V AC 50/60 Hz for 3 phases motors   |
| Compatibility Code                          | LC1D  |
| Pole Contact Composition                    | 3 NO  |
| Contact Compatibility                       | M4  |
| Protective Cover                            | With  |
| [Ith] Conventional Free Air Thermal Current | 10 A (at 60 °C) for signalling circuit<br>80 A (at 60 °C) for power circuit   |

|   |  |
|---|--|
| <b>Irms Rated Making Capacity</b>               | 140 A AC for signalling circuit conforming to IEC 60947-5-1<br>250 A DC for signalling circuit conforming to IEC 60947-5-1<br>1000 A at 440 V for power circuit conforming to IEC 60947  |
| <b>Rated Breaking Capacity</b>                  | 1000 A at 440 V for power circuit conforming to IEC 60947  |
| <b>[Icw] Rated Short-Time Withstand Current</b> | 640 A 40 °C - 10 s for power circuit<br>900 A 40 °C - 1 s for power circuit<br>110 A 40 °C - 10 min for power circuit<br>260 A 40 °C - 1 min for power circuit<br>100 A - 1 s for signalling circuit<br>120 A - 500 ms for signalling circuit<br>140 A - 100 ms for signalling circuit |
| <b>Associated Fuse Rating</b>                   | 10 A gG for signalling circuit conforming to IEC 60947-5-1<br>125 A gG at ≤ 690 V coordination type 1 for power circuit<br>125 A gG at ≤ 690 V coordination type 2 for power circuit   |
| <b>Average Impedance</b>                        | 1.5 mOhm - Ith 80 A 50 Hz for power circuit  |
| <b>Power Dissipation Per Pole</b>               | 9.6 W AC-1<br>6.3 W AC-3<br>6.3 W AC-3e  |
| <b>[Ui] Rated Insulation Voltage</b>            | Power circuit: 600 V CSA certified<br>Power circuit: 600 V UL certified<br>Signalling circuit: 690 V conforming to IEC 60947-1<br>Signalling circuit: 600 V CSA certified<br>Signalling circuit: 600 V UL certified<br>Power circuit: 690 V conforming to IEC 60947-4-1                |
| <b>Overvoltage Category</b>                     | III  |
| <b>Pollution Degree</b>                         | 3  |
| <b>[Uimp] Rated Impulse Withstand Voltage</b>   | 6 kV conforming to IEC 60947   |
| <b>Safety Reliability Level</b>                 | B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1<br>B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1   |
| <b>Mechanical Durability</b>                    | 10 Mcycles   |
| <b>Electrical Durability</b>                    | 0.5 Mcycles 80 A AC-1 at Ue ≤ 440 V<br>1.45 Mcycles 65 A AC-3 at Ue ≤ 440 V<br>1.45 Mcycles 65 A AC-3e at Ue ≤ 440 V   |
| <b>Control Circuit Type</b>                     | DC standard  |
| <b>Coil Technology</b>                          | Built-in bidirectional peak limiting diode suppressor  |
| <b>Control Circuit Voltage Limits</b>           | 0.1...0.3 Uc (-40...70 °C):drop-out DC<br>0.75...1.25 Uc (-40...60 °C):operational DC<br>1...1.25 Uc (60...70 °C):operational DC   |
| <b>Inrush Power In W</b>                        | 19 W (at 20 °C)  |
| <b>Hold-In Power Consumption In W</b>           | 7.4 W at 20 °C   |
| <b>Operating Time</b>                           | 50 ±15 % ms closing<br>16...24 ms opening  |
| <b>Time Constant</b>                            | 34 ms  |
| <b>Maximum Operating Rate</b>                   | 3600 cyc/h 60 °C   |



|                                |  |
|--------------------------------|--|
| <b>Connections - Terminals</b> | Control circuit: screw clamp terminals 2 1...2.5 mm <sup>2</sup> - cable stiffness: flexible with cable end  |
|                                | Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: flexible without cable end |
|                                | Control circuit: screw clamp terminals 2 1...4 mm <sup>2</sup> - cable stiffness: flexible without cable end |
|                                | Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: flexible with cable end    |
|                                | Control circuit: screw clamp terminals 1 1...4 mm <sup>2</sup> - cable stiffness: solid without cable end    |
|                                | Control circuit: screw clamp terminals 2 1...4 mm <sup>2</sup> - cable stiffness: solid without cable end    |
|                                | Power circuit: screw connection 1 1...35 mm <sup>2</sup> - cable stiffness: flexible without cable end       |
|                                | Power circuit: screw connection 2 1...25 mm <sup>2</sup> - cable stiffness: flexible without cable end       |
|                                | Power circuit: screw connection 1 1...35 mm <sup>2</sup> - cable stiffness: flexible with cable end          |
|                                | Power circuit: screw connection 2 1...25 mm <sup>2</sup> - cable stiffness: flexible with cable end          |
|                                | Power circuit: screw connection 1 1...35 mm <sup>2</sup> - cable stiffness: solid without cable end          |
|                                | Power circuit: screw connection 2 1...25 mm <sup>2</sup> - cable stiffness: solid without cable end          |

|                          |   |
|--------------------------|---|
| <b>Tightening Torque</b> | Control circuit: 1.7 N.m - on EverLink BTR screw connectors - with screwdriver flat Ø 6 mm                        |
|                          | Control circuit: 1.7 N.m - on EverLink BTR screw connectors - with screwdriver Philips No 2                       |
|                          | Power circuit: 8 N.m - on EverLink BTR screw connectors - cable 25...35 mm <sup>2</sup> hexagonal screw head 4 mm |
|                          | Power circuit: 5 N.m - on EverLink BTR screw connectors - cable 1...25 mm <sup>2</sup> hexagonal screw head 4 mm  |
|                          | Control circuit: 1.7 N.m - on EverLink BTR screw connectors - with screwdriver pozidriv No 2                      |
|                          | Power circuit: 2.5 N.m - on EverLink BTR screw connectors - with screwdriver pozidriv No 2                        |

|                                      |             |
|--------------------------------------|-------------|
| <b>Auxiliary Contact Composition</b> | 1 NO + 1 NC |
|--------------------------------------|-------------|

|                                |  |
|--------------------------------|--|
| <b>Auxiliary Contacts Type</b> | type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1<br>type mirror contact 1 NC conforming to IEC 60947-4-1 |
|--------------------------------|--|

|                                     |             |
|-------------------------------------|-------------|
| <b>Signalling Circuit Frequency</b> | 25...400 Hz |
|-------------------------------------|-------------|

|                                  |                             |
|----------------------------------|-----------------------------|
| <b>Minimum Switching Voltage</b> | 17 V for signalling circuit |
|----------------------------------|-----------------------------|

|                                  |                             |
|----------------------------------|-----------------------------|
| <b>Minimum Switching Current</b> | 5 mA for signalling circuit |
|----------------------------------|-----------------------------|

|                              |                                  |
|------------------------------|----------------------------------|
| <b>Insulation Resistance</b> | > 10 MOhm for signalling circuit |
|------------------------------|----------------------------------|

|                         |   |
|-------------------------|---|
| <b>Non-Overlap Time</b> | 1.5 ms on de-energisation between NC and NO contact |
|                         | 1.5 ms on energisation between NC and NO contact    |

|                         |       |
|-------------------------|-------|
| <b>Mounting Support</b> | Plate |
|                         | Rail  |

## Environment

|                  |                 |
|------------------|-----------------|
| <b>Standards</b> | CSA C22.2 No 14 |
|                  | EN 60947-4-1    |
|                  | EN 60947-5-1    |
|                  | IEC 60947-4-1   |
|                  | IEC 60947-5-1   |
|                  | UL 508          |
|                  | IEC 60335-1     |

|                               |      |
|-------------------------------|------|
| <b>Product Certifications</b> | GOST |
|                               | UL   |
|                               | CCC  |
|                               | CSA  |

|                                |   |
|--------------------------------|---|
| <b>Ip Degree Of Protection</b> | IP20 front face conforming to IEC 60529 |
|--------------------------------|---|

|                             |                                 |
|-----------------------------|---------------------------------|
| <b>Protective Treatment</b> | TH conforming to IEC 60068-2-30 |
|-----------------------------|---------------------------------|

|                           |  |
|---------------------------|--|
| <b>Climatic Withstand</b> | conforming to IACS E10 exposure to damp heat                       |
|                           | conforming to IEC 60947-1 Annex Q category D exposure to damp heat |

|  |  |
|--|--|
| <b>Permissible Ambient Air Temperature Around The Device</b> | -40...60 °C<br>60...70 °C with derating  |
| <b>Operating Altitude</b>                                    | 0...3000 m   |
| <b>Fire Resistance</b>                                       | 850 °C conforming to IEC 60695-2-1   |
| <b>Flame Retardance</b>                                      | V1 conforming to UL 94   |
| <b>Mechanical Robustness</b>                                 | Vibrations contactor open (2 Gn, 5...300 Hz)<br>Vibrations contactor closed (4 Gn, 5...300 Hz)<br>Shocks contactor closed (15 Gn for 11 ms)<br>Shocks contactor open (10 Gn for 11 ms) |
| <b>Height</b>  | 122 mm   |
| <b>Width</b>   | 55 mm  |
| <b>Depth</b>   | 120 mm   |
| <b>Net Weight</b>  | 0.935 kg   |

## Packing Units

|                                     |           |
|-------------------------------------|-----------|
| <b>Unit Type Of Package 1</b>       | PCE       |
| <b>Number Of Units In Package 1</b> | 1         |
| <b>Package 1 Height</b>             | 6.2 cm    |
| <b>Package 1 Width</b>              | 13.5 cm   |
| <b>Package 1 Length</b>             | 15.2 cm   |
| <b>Package 1 Weight</b>             | 984.0 g   |
| <b>Unit Type Of Package 2</b>       | S02       |
| <b>Number Of Units In Package 2</b> | 10        |
| <b>Package 2 Height</b>             | 15.0 cm   |
| <b>Package 2 Width</b>              | 30.0 cm   |
| <b>Package 2 Length</b>             | 40.0 cm   |
| <b>Package 2 Weight</b>             | 10.39 kg  |
| <b>Unit Type Of Package 3</b>       | P06       |
| <b>Number Of Units In Package 3</b> | 160       |
| <b>Package 3 Height</b>             | 77.0 cm   |
| <b>Package 3 Width</b>              | 80.0 cm   |
| <b>Package 3 Length</b>             | 60.0 cm   |
| <b>Package 3 Weight</b>             | 174.74 kg |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| <b>Warranty</b> | 18 months |
|-----------------|-----------|

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Reach Free Of Svhc

Mercury Free

Rohs Exemption Information Yes

Pvc Free

## Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Compliant

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)

Environmental Disclosure

[Product Environmental Profile](#)

Weee


The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Circularity Profile

[End of Life Information](#)

Dimensions Drawings

Dimensions

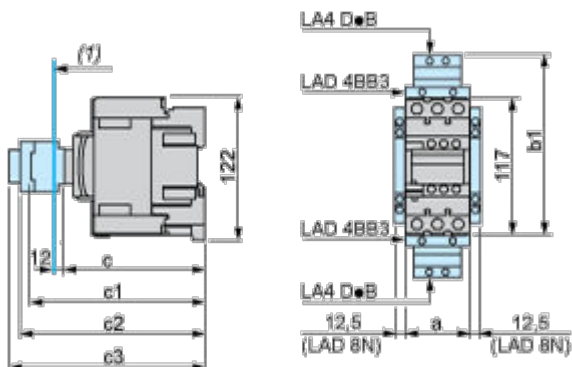

(1) Minimum electrical clearance

| LC1 |                                    | D40A...D65A |
|-----|------------------------------------|-------------|
| a   |                                    | 55          |
| b1  | with LAD 4BB3                      | 136         |
|     | with LA4 DF, DT                    | 157         |
| c   | without cover or add-on blocks     | 118         |
|     | with cover, without add-on blocks  | 120         |
| c1  | with LAD N (1 contact)             | –           |
|     | with LAD N or C (2 or 4 contacts)  | 150         |
| c2  | with LA6 DK10                      | 163         |
| c3  | with LAD T, R, S                   | 171         |
|     | with LAD T, R, S and sealing cover | 175         |

Connections and Schema

Wiring

