

Product data sheet کلیک کنید

Specifications



IEC contactor, TeSys Deca, nonreversing, 95A, 60HP at 480VAC, 3 phase, 3 pole, 3 NO, 24VAC 50/60Hz coil, open style

LC1D95B7

Product availability: Stock - Normally stocked in distribution facility

Price*: 437.00 USD

Main

Range	TeSys
Range Of Product	TeSys Deca
Product Or Component Type	Contactors
Device Short Name	LC1D
Contactors Application	Motor control Resistive load
Utilisation Category	AC-3 AC-3e AC-4 AC-1
Poles Description	3P
[Ue] Rated Operational Voltage	Power circuit <= 690 V AC 25...400 Hz
[Ie] Rated Operational Current	95 A (at <140 °F (60 °C)) at <= 440 V AC-3 for power circuit 125 A (at <140 °F (60 °C)) at <= 690 V AC-1 for power circuit 95 A (at <140 °F (60 °C)) at <= 440 V AC-3e for power circuit
[Uc] Control Circuit Voltage	24 V AC 50/60 Hz

Complementary

Motor Power Kw	25 kW at 220...230 V AC 50 Hz (AC-3) 45 kW at 380...400 V AC 50 Hz (AC-3) 45 kW at 415...440 V AC 50 Hz (AC-3) 55 kW at 500 V AC 50 Hz (AC-3) 45 kW at 660...690 V AC 50 Hz (AC-3) 15 kW at 400 V AC 50 Hz (AC-4) 25 kW at 220...230 V AC 50 Hz (AC-3e) 45 kW at 380...400 V AC 50 Hz (AC-3e) 45 kW at 415...440 V AC 50 Hz (AC-3e) 55 kW at 500 V AC 50 Hz (AC-3e) 45 kW at 660...690 V AC 50 Hz (AC-3e)
Maximum Horse Power Rating	7.5 hp at 120 V AC 60 Hz for 1 phase motors 15 hp at 230/240 V AC 60 Hz for 1 phase motors 30 hp at 200/208 V AC 60 Hz for 3 phase motors 30 hp at 230/240 V AC 60 Hz for 3 phase motors 60 hp at 460/480 V AC 60 Hz for 3 phase motors 60 hp at 575/600 V AC 60 Hz for 3 phase motors
Compatibility Code	LC1D
Pole Contact Composition	3 NO
Contact Compatibility	M11
Protective Cover	With

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

[Ith] Conventional Free Air Thermal Current	10 A (at 140 °F (60 °C)) for signalling circuit 125 A (at 140 °F (60 °C)) for power circuit
Irms Rated Making Capacity	1100 A at 440 V AC for power circuit conforming to IEC 60947 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1
Rated Breaking Capacity	1100 A at 440 V for power circuit conforming to IEC 60947
[Icw] Rated Short-Time Withstand Current	1100 A 104 °F (40 °C) - 1 s for power circuit 800 A 104 °F (40 °C) - 10 s for power circuit 400 A 104 °F (40 °C) - 1 min for power circuit 135 A 104 °F (40 °C) - 10 min for power circuit 140 A - 100 ms for signalling circuit 120 A - 500 ms for signalling circuit 100 A - 1 s for signalling circuit
Associated Fuse Rating	10 A gG for signalling circuit conforming to IEC 60947-5-1 200 A gG at ≤ 690 V coordination type 1 for power circuit 160 A gG at ≤ 690 V coordination type 2 for power circuit
Average Impedance	0.8 mOhm - Ith 125 A 50 Hz for power circuit
Power Dissipation Per Pole	12.5 W AC-1 7.2 W AC-3 7.2 W AC-3e
[Ui] Rated Insulation Voltage	Power circuit 1000 V IEC 60947-4-1 Power circuit 600 V CSA Power circuit 600 V UL Signalling circuit 690 V IEC 60947-1 Signalling circuit 600 V CSA Signalling circuit 600 V UL
Overvoltage Category	III
Pollution Degree	3
[Uimp] Rated Impulse Withstand Voltage	8 kV IEC 60947
Safety Reliability Level	B10d = 1.3 Mcycles contactor with nominal load EN/ISO 13849-1 B10d = 20 Mcycles contactor with mechanical load EN/ISO 13849-1
Mechanical Durability	4 Mcycles
Electrical Durability	1.2 Mcycles 95 A AC-3 1.3 Mcycles 125 A AC-1 1.2 Mcycles 95 A AC-3e
Control Circuit Type	AC 50/60 Hz standard
Coil Technology	Without built-in suppressor module
Control Circuit Voltage Limits	0.8...1.1 Uc -40...131 °F (-40...55 °C) operational AC 50 Hz 0.85...1.1 Uc -40...131 °F (-40...55 °C) operational AC 60 Hz 0.3...0.6 Uc -40...158 °F (-40...70 °C) drop-out AC 50/60 Hz 1...1.1 Uc 131...158 °F (55...70 °C) operational AC 50/60 Hz
Inrush Power In Va	245 VA 60 Hz cos phi 0.75 (at 68 °F (20 °C)) 245 VA 50 Hz cos phi 0.75 (at 68 °F (20 °C))
Hold-In Power Consumption In Va	26 VA 60 Hz cos phi 0.3 (at 68 °F (20 °C)) 26 VA 50 Hz cos phi 0.3 (at 68 °F (20 °C))
Heat Dissipation	6...10 W at 50/60 Hz
Operating Time	20...35 ms closing 6...20 ms opening
Maximum Operating Rate	3600 cyc/h 140 °F (60 °C)

Connections - Terminals	<p>Control circuit: screw clamp terminals 2 0.00...0.00 in² (1...2.5 mm²) - cable stiffness: flexible with cable end</p> <p>Control circuit: screw clamp terminals 1 0.00...0.00 in² (1...2.5 mm²) - cable stiffness: flexible with cable end</p> <p>Control circuit: screw clamp terminals 1 0.00...0.01 in² (1...4 mm²) - cable stiffness: flexible without cable end</p> <p>Control circuit: screw clamp terminals 2 0.00...0.01 in² (1...4 mm²) - cable stiffness: flexible without cable end</p> <p>Control circuit: screw clamp terminals 1 0.00...0.01 in² (1...4 mm²) - cable stiffness: solid without cable end</p> <p>Control circuit: screw clamp terminals 2 0.00...0.01 in² (1...4 mm²) - cable stiffness: solid without cable end</p> <p>Power circuit: connector 1 0.01...0.08 in² (4...50 mm²) - cable stiffness: flexible without cable end</p> <p>Power circuit: connector 2 0.01...0.04 in² (4...25 mm²) - cable stiffness: flexible without cable end</p> <p>Power circuit: connector 1 0.01...0.08 in² (4...50 mm²) - cable stiffness: flexible with cable end</p> <p>Power circuit: connector 2 0.01...0.02 in² (4...16 mm²) - cable stiffness: flexible with cable end</p> <p>Power circuit: connector 1 0.01...0.08 in² (4...50 mm²) - cable stiffness: solid without cable end</p> <p>Power circuit: connector 2 0.01...0.04 in² (4...25 mm²) - cable stiffness: solid without cable end</p>
Tightening Torque	<p>Control circuit 10.62 lbf.in (1.2 N.m) screw clamp terminals flat Ø 6 mm</p> <p>Control circuit 10.62 lbf.in (1.2 N.m) screw clamp terminals Philips No 2</p> <p>Power circuit 106.21 lbf.in (12 N.m) connector flat Ø 6 to Ø 8 mm</p> <p>Power circuit 106.21 lbf.in (12 N.m) connector hexagonal 0.16 in (4 mm)</p> <p>Control circuit 10.62 lbf.in (1.2 N.m) screw clamp terminals pozidriv No 2</p>
Auxiliary Contact Composition	1 NO + 1 NC
Auxiliary Contacts Type	Mechanically linked 1 NO + 1 NC IEC 60947-5-1 Mirror contact 1 NC IEC 60947-4-1
Signalling Circuit Frequency	25...400 Hz
Minimum Switching Voltage	17 V for signalling circuit
Minimum Switching Current	5 mA for signalling circuit
Insulation Resistance	> 10 MOhm for signalling circuit
Non-Overlap Time	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
Mounting Support	Plate Rail

Environment

Standards	<p>EN/IEC 60947-1</p> <p>EN/IEC 60947-4-1</p> <p>EN/IEC 60947-5-1</p> <p>UL 60947-4-1</p> <p>UL 60947-5-1</p> <p>CSA C22.2 No 60947-4-1</p> <p>CSA C22.2 No 60947-5-1</p> <p>GB/T 14048.4</p>
Product Certifications	<p>IECEE CB Scheme</p> <p>UL</p> <p>CSA</p> <p>CCC</p> <p>EAC</p> <p>LROS (Lloyds register of shipping)</p> <p>RINA</p> <p>BV</p> <p>DNV-GL</p>
Ip Degree Of Protection	IP20 front face IEC 60529
Protective Treatment	THIEC 60068-2-30
Climatic Withstand	IACS E10 exposure to damp heat

Permissible Ambient Air Temperature Around The Device	-40...140 °F (-40...60 °C) 140...158 °F (60...70 °C) with derating
Operating Altitude	0...9842.52 ft (0...3000 m)
Fire Resistance	1562 °F (850 °C) IEC 60695-2-1
Flame Retardance	V1 conforming to UL 94
Mechanical Robustness	Vibrations contactor open 2 Gn, 5...300 Hz) Shocks contactor open 8 Gn for 11 ms) Vibrations contactor closed 3 Gn, 5...300 Hz) Shocks contactor closed 10 Gn for 11 ms)
Height	5.00 in (127 mm)
Width	3.35 in (85 mm)
Depth	5.12 in (130 mm)
Net Weight	3.55 lb(US) (1.61 kg)

Ordering and shipping details

Category	US10I1222359
Discount Schedule	0I12
Gtin	3389110450651
Returnability	Yes
Country Of Origin	US

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.74 in (9.5 cm)
Package 1 Width	5.31 in (13.5 cm)
Package 1 Length	5.51 in (14 cm)
Package 1 Weight	3.45 lb(US) (1.564 kg)
Unit Type Of Package 2	S02
Number Of Units In Package 2	5
Package 2 Height	5.91 in (15 cm)
Package 2 Width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	18.24 lb(US) (8.275 kg)
Unit Type Of Package 3	P06
Number Of Units In Package 3	80
Package 3 Height	31.50 in (80 cm)
Package 3 Width	31.50 in (80 cm)
Package 3 Length	23.62 in (60 cm)
Package 3 Weight	310.63 lb(US) (140.9 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

✓ Pvc Free

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Compliant

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile


No need of specific recycling operations

California Proposition 65

WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions

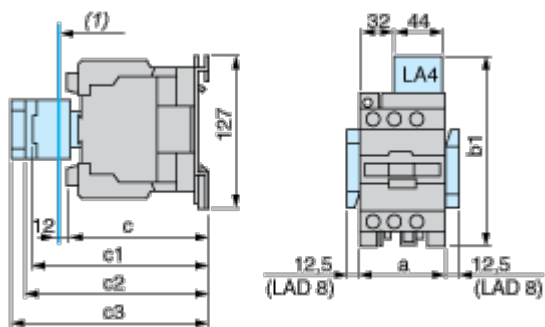

(1) Minimum electrical clearance

LC1		D80	D95
a		85	85
b1	with LA4 D•2	135	135
	with LA4 DB3 or LAD 4BB3	135	–
	with LA4 DF, DT	142	142
	with LA4 DM, DW, DL	150	150
c	without cover or add-on blocks	125	125
	with cover, without add-on blocks	130	130
c1	with LAD N (1 contact)	150	150
	with LAD N or C (2 or 4 contacts)	158	158
c2	with LA6 DK10, LAD 6DK	170	170
c3	with LAD T, R, S	178	178
	with LAD T, R, S and sealing cover	182	182

Connections and Schema

Wiring

